


## Double pushbutton and changeover switches


YW4027N - YG4027N - YD4027N  
 YW4027HN - YG4027HN - YD4027HN  
 YW4027NM2 - YG4027NM2 - YD4027NM2  
 YW4036 - YG4036 - YD4036  
 YW4037N - YG4037N - YD4037N  
 YW4037NM2 - YG4037NM2 - YD4037NM2

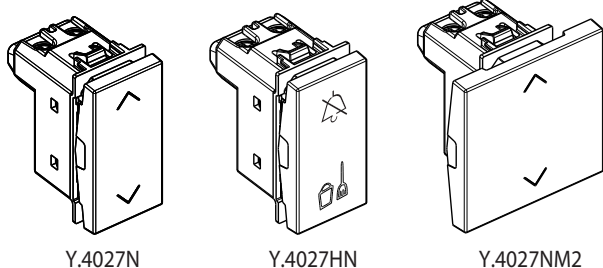

Y.4027N

Y.4027HN

Y.4027NM2

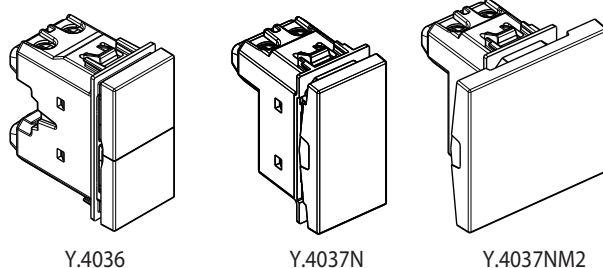

Y.4036

Y.4037N

Y.4037NM2

### Use


Control devices for lighting and other loads.  
 Y.4027HN with double signalling: "do not disturb" and "make up the room", for internal hotel room. Not lightable.

### Range

| Designation                                                                      | Item                                                                                                                      |
|----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|
| Changeover switches 1P 10AX - 250Va.c.<br>Key cover 1-0-2<br>1 module            | <input type="checkbox"/> YW4027N<br><input checked="" type="checkbox"/> YG4027N<br><input type="checkbox"/> YD4027N       |
| Changeover switches 1P 10AX - 250Va.c.<br>Key cover 1-0-2<br>1 module            | <input type="checkbox"/> YW4027HN<br><input checked="" type="checkbox"/> YG4027HN<br><input type="checkbox"/> YD4027HN    |
| Changeover switches 1P 10AX - 250Va.c.<br>Double Key cover 1-0-2<br>2 modules    | <input type="checkbox"/> YW4027NM2<br><input checked="" type="checkbox"/> YG4027NM2<br><input type="checkbox"/> YD4027NM2 |
| Double pushbutton<br>1P (NO) + 1P (NO) 10A - 250Va.c.<br>1 module                | <input type="checkbox"/> YW4036<br><input checked="" type="checkbox"/> YG4036<br><input type="checkbox"/> YD4036          |
| Double pushbutton with interlock<br>1P (NO) + 1P (NO) 10A - 250Va.c.<br>1 module | <input type="checkbox"/> YW4037N<br><input checked="" type="checkbox"/> YG4037N<br><input type="checkbox"/> YD4037N       |
| Double pushbutton with interlock<br>1P (NO) + 1P (NO) 10A - 250Va.c.<br>2 module | <input type="checkbox"/> YW4037NM2<br><input checked="" type="checkbox"/> YG4037NM2<br><input type="checkbox"/> YD4037NM2 |

**Colors:** ☐ White ☒ Stone ☐ Dark

### Overall dimensions (mm)

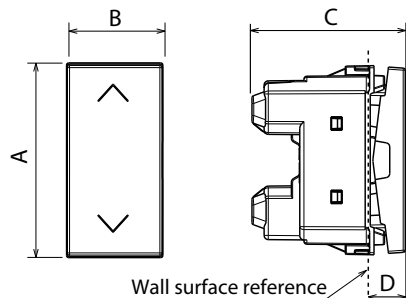

|                              | A    | B    | C    | D   |
|------------------------------|------|------|------|-----|
| Y.4027N / Y.4027HN / Y.4037N | 45.1 | 22.3 | 36.5 | 8.6 |
| Y.4036                       | 45.1 | 22.3 | 39.1 | 8.6 |
| Y.4027NM2 / Y.4037NM2        | 45.1 | 45   | 36.5 | 8.6 |

### Connection

Terminal type: screw clamp  
 Terminal capacity: 2 x 4 mm<sup>2</sup> max  
 Stripping length: 9 mm  
 Compatible with flexible or rigid cables

### Technical characteristics

- **Protection index:**  
 (considering a complete installation, including cover plate)
  - Penetration by solid bodies/liquid: IP40
  - Impact test: IK04
- **Material characteristics:**
  - Case: PC (polycarbonate)
  - Key cover: ABS
  - Halogen Free
  - UV resistant
  - Self-extinguishing:
- 850°C/30s for insulating parts holding live parts in place.  
 650°C/30s for other parts made of insulating material.
- **Electrical characteristics:**
  - Voltage: 250 V a.c.
  - Current: 10AX for ..4027N / ..4027HN / ..4027NM2
  - Current: 10A for ..4036 / ..4037N / ..4037NM2
- **Climatic characteristics:**
  - Storage temperature: -10° C a +70° C
  - Use temperature: -5° C a +35° C

### Cleaning

Clean the surface with a cloth.  
 Do not use acetone, tar-removing cleaning agents or trichloroethylene.

**Caution: Always test before using special cleaning products.**

### Standards and approvals

Compliance with standards IEC/EN/CEI 60669-1.

Refer to e.catalogue.